



# Flameproof Tube Light Fixture 2x36W CFL Flush Mounting Type

● **Technical Data : LT 51236**

**ENCLOSURE :**

Ex-d, GAS Gr. IIA & IIB AS PER IS/IEC 60079-1:2007

**PROTECTION :**

IP-65 AS PER IS/IEC 60529:2001

**AREA CLASSIFICATION :**

ZONE-1 & 2

**CERTIFICATION :**

ERTL(E)/TES/FO42/0085/07-04

ERTL(E)/TES/FO42/0005/08-06

**MATERIAL OF CONSTRUCTION :**

CAST ALUMINIUM ALLOY

**RATING & TEMP. CLASSIFICATION :**

2 x 36 Watt CFL & T6

4 x 26 Watt CFL & T6

**TRANSPARENT PART :**

HEAT RESISTANT & TOUGHENED CLEAR FLAT GLASS

**INTERNAL REFLECTOR :**

ALUMINIUM ANODISED

**FINISH :**

DARK ADMIRALTY GREY EPOXY POWDER COATED 632

AS PER IS:5.

**EARTHING :**

1 No. INSIDE & 2 Nos. OUTSIDE

**CABLE ENTRY :**

M20 x 2 Nos.

**OPTIONAL ACCESSORIES AT EXTRA COST :**

1) CABLE GLAND & STOPPER

2) PAINT SHADE AS PER CLIENT REQUIREMENT

3) S.S. FRAME FOR FRONT SIDE



**NOTE :**

1) LAMP REPLACEMENT & FITTING FIXING ARRANGEMENT IS FROM THE TOP SIDE.



2) COVER FIXING SCREWS ARE NON FALLING TYPE.



TOP OPENABLE

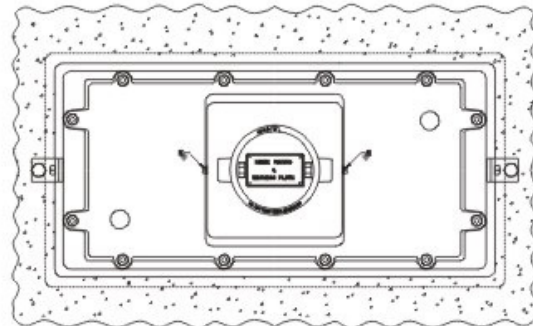

BOTTOM SIDE

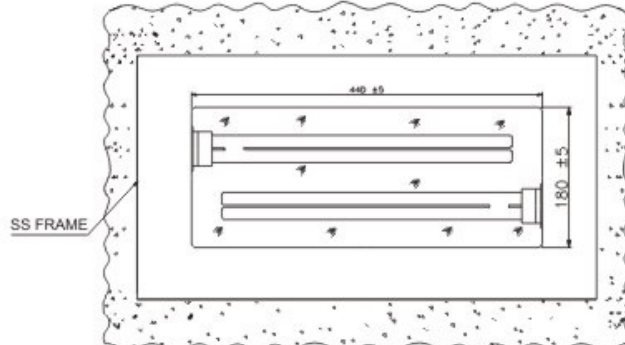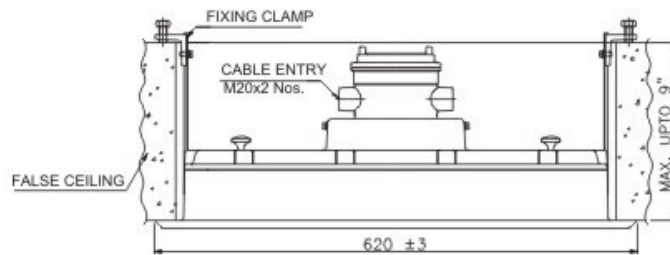

FALSE CEILING CUT OUT  
565 x 270 ±5mm

CLAMPING ARRANGEMENT  
6" TO 9" ADJUSTABLE BRACKET