



Flameproof Tube Light Fixture 2x36W CFL Flush Mounting Type

● **Technical Data : LT 51236**

ENCLOSURE :

Ex-d, GAS Gr. IIA & IIB AS PER IS/IEC 60079-1:2007

PROTECTION :

IP-65 AS PER IS/IEC 60529:2001

AREA CLASSIFICATION :

ZONE -1 & 2

CERTIFICATION :

ERTL(E)/TES/FO42/0085/07-04 ERTL(E)/TES/FO42/0005/08-06

MATERIAL OF CONSTRUCTION :

DIE CAST ALUMINIUM ALLOY

RATING & TEMP. CLASSIFICATION :

2 x 36 Watt CFL - T6

4 x 26 Watt CFL - T6

TRANSPARENT PART :

HEAT RESISTANT & TOUGHENED CLEAR FLAT GLASS

INTERNAL REFLECTOR :

ALUMINIUM ANODISED

FINISH :

DARK ADMIRALTY GREY EPOXY POWDER COATED 632 AS PER IS:5.

EARTHING :

1 No. INSIDE & 2 Nos. OUTSIDE

CABLE ENTRY :


M20 x 2 Nos.

OPTIONAL ACCESSORIES AT EXTRA COST :





- 1) CABLE GLAND & STOPPER
- 2) PAINT SHADE AS PER CLIENT REQUIREMENT
- 3) S.S. FRAME FOR FRONT SIDE

NOTE :

- 1) LAMP REPLACEMENT & FITTING FIXING ARRANGEMENT IS FROM THE FRONT SIDE.
- 2) COVER FIXING SCREWS ARE NON FALLING TYPE.

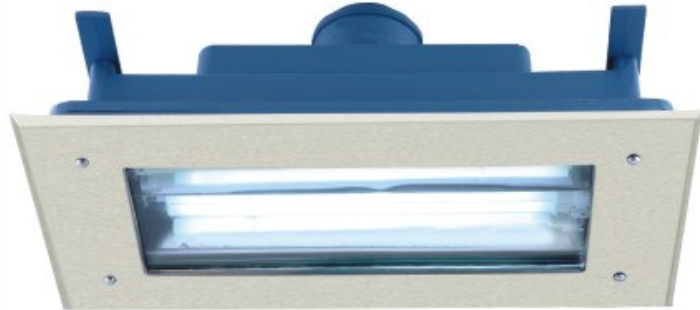

BOTTOM OPENABLE

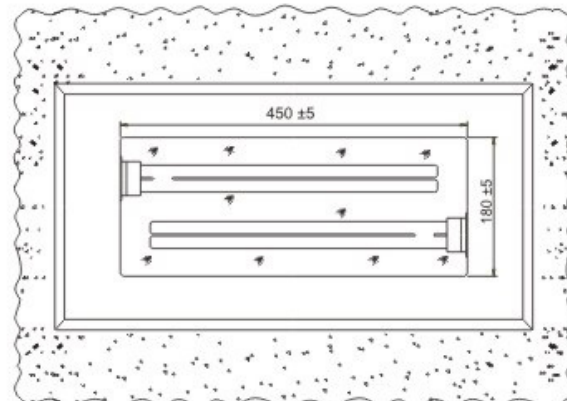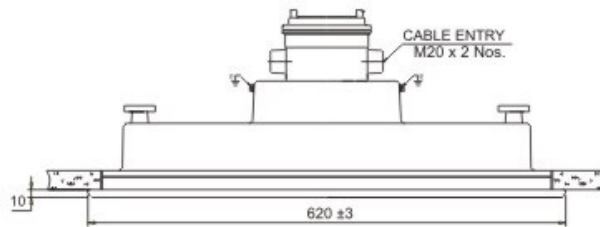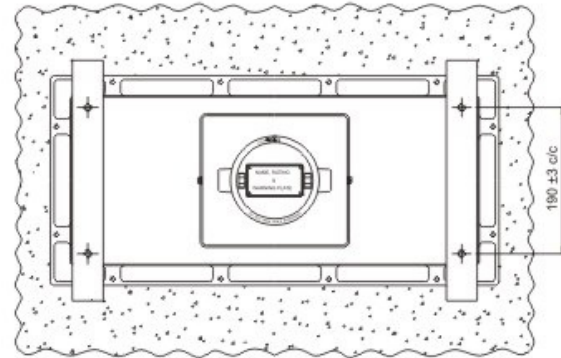

FALSE CEILING CUT OUT
585 x 285 ± 5mm

CLAMPING ARRANGEMENT
6" TO 9" ADJUSTABLE BRACKET