



FLP/WP Flush Mounting Switch Socket Combined

● Technical Data : PB 31254 / PB 61204

ENCLOSURE :

Ex-d, GAS Gr. IIA / IIB & IIC AS PER IS/IEC 60079-1:2007

PROTECTION :

IP-65 AS PER IS/IEC 60529:2001

AREA CLASSIFICATION :

ZONE -1 & 2

CERTIFICATION :

ERTL(E)/TES/FO42/0014/02-05

MATERIAL OF CONSTRUCTION :

PRESSURE DIE CAST ALUMINIUM ALLOY

RATING & SURFACE TEMP. CLASS :

UPTO 32A, 415V, AC, UPTO 2P+N+E, 50/60 Hz. & T6

COMPONENTS :

- A) SWITCH, UPTO 32A, DP 415V - 1 No.
- B) MATCHING PLUG & SOCKET 3/4/5 PIN - 1 No.
- C) TERMINALS, CLIPON TYPE RAIL MOUNTED 4/6 Sq.mm.

FINISH :

DAK ADMIRALTY GREY EPOXY POWDER COATED 632 AS PER IS:5.

EARTHING :


1 No. INSIDE & 2 Nos. OUTSIDE,

CABLE ENTRY :


M20 x 2 Nos.

SPECIAL FEATURES :

THIS UNIT IS FLAMEPROOF INTERLOCKED. SWITCH CAN NOT BE PUT "ON" UNLESS PLUG IS FULLY INSERTED AND ROTATED CLOCKWISE OR PLUG CAN NOT BE PULLED OUT UNLESS SWITCH IS PUT "OFF" BY ROTATING THE PLUG IN THE ANTICLOCKWISE DIRECTION.

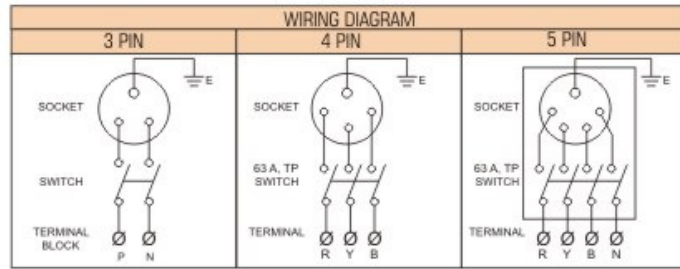

CUT OUT SIZE
405 x 185 ±3mm

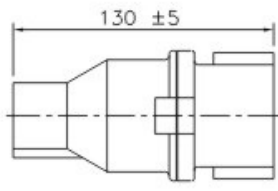

PLUG DETAIL

