



Ex e mb Fluorescent Tube Light Fixture In Non-metallic Enclosure

● Technical Data : NLLK 2010...SERIES

ENCLOSURE :

Ex e mb IIC AS PER IS/IEC 60079-7 & IS/IEC 60079-18

PROTECTION :

IP 66

AREA CLASSIFICATION :

ZONE 1-2

CERTIFICATION :

ITS/IN/EX/11/001

MATERIAL OF CONSTRUCTION :

GLASS-MAT REINFORCED (PREPAG) POLYESTER

TRANSPARENT PART :

IMPACT RESISTANT POLYCARBONATE

HARDWARE :

STAINLESS STEEL

EARTHING :

1 No. INSIDE

CABLE ENTRY :



M20 x 2 Nos.

OPTIONAL ACCESSORIES AT EXTRA COST :

- 1) MOUNTING BRACKET
- 2) CABLE GLAND
- 3) STOPPING PLUG
- 4) TUBE LAMP

NOTE :

THIS FLUORESCENT TUBE LIGHT FIXTURE IS ALSO AVAILABLE IN Ex 'nR' FOR ZONE-2 APPLICATION

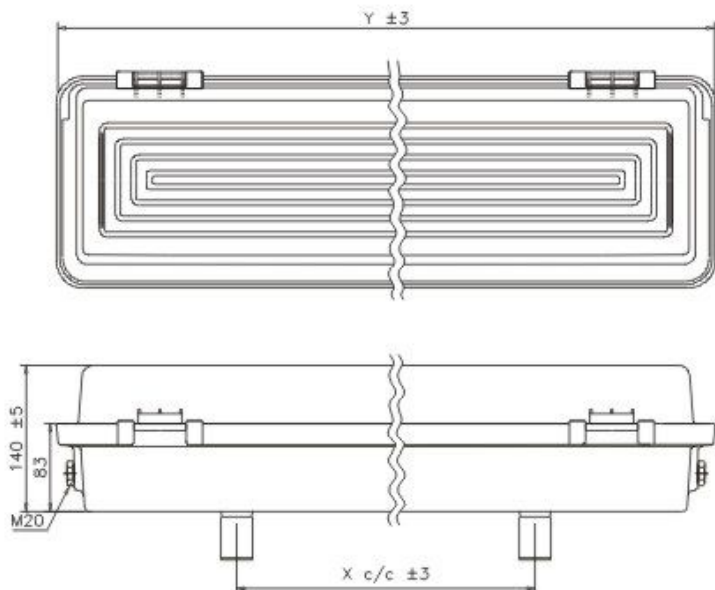

Sr. No.	LUMINAIRE TYPE No.	FLUORESCENT LAMPS RATING	X (mm)	Y (mm)
01	NLLK 201040/1	1 x 36/40W, AT VOLTAGE 250V, AC	700	1353
02	NLLK 201040/2	2 x 36/40W, AT VOLTAGE 250V, AC	700	1353
03	NLLK 201020/1	1 x 18/20W, AT VOLTAGE 250V, AC	400	743
04	NLLK 201020/2	2 x 18/20W, AT VOLTAGE 250V, AC	400	743
05	NLLK 201036/2	2 x 36W CFL, AT VOLTAGE 250V, AC	400	743
06	NLLK 201028/1	1 x 28W (T5), VOLTAGE 250V, AC	700	1353
07	NLLK 201028/2	2 x 28W (T5), VOLTAGE 250V, AC	700	1353